




Order designation: JM-DC-B-SYN-load-stroke (- current) - M 8 / Ø D 1 (top) Ø D 2 (bottom)
Example: JM-DC-B-SYN-650-500-M 8/Ø 6,1 Ø 6,1

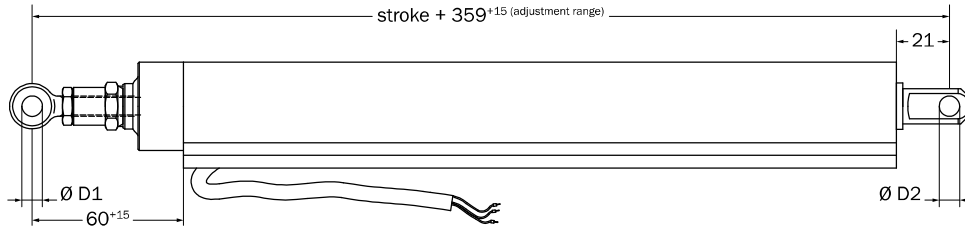


Order designation: JM-DC-B-SYN-load-stroke (- current) - M 8 / Ø D 1 (top) M 8 Ø D 2 (bottom)
Example: JM-DC-B-SYN-650-500-M 8/Ø 8,1 M 8/Ø 8,1

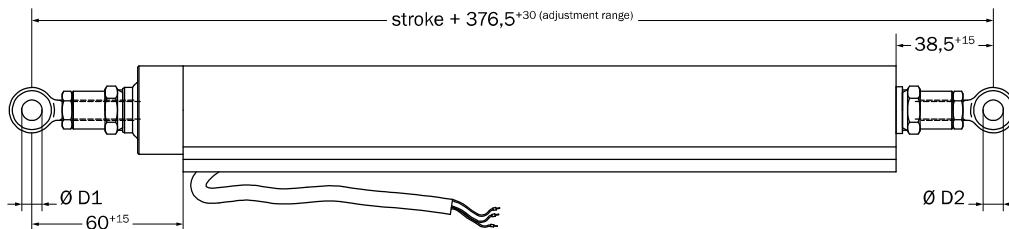


Order designation: JM-DC-B-SYN-load-stroke (- current) - M 10 (top) Ø D 2 (bottom)
Example: JM-DC-B-SYN-650-500-M 10 Ø 8,1

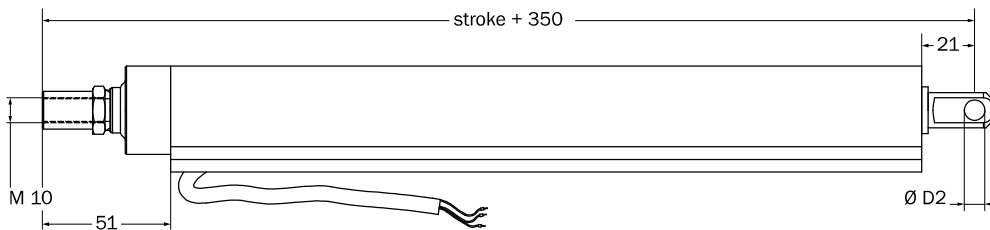

Order designation: JM-DC-B-SYN-load-stroke (- current) - M 10 GK Ø D 1 (top) Ø D 2 (bottom)
Example: JM-DC-B-SYN-650-750-M 10 GK Ø 6,1 Ø 6,1

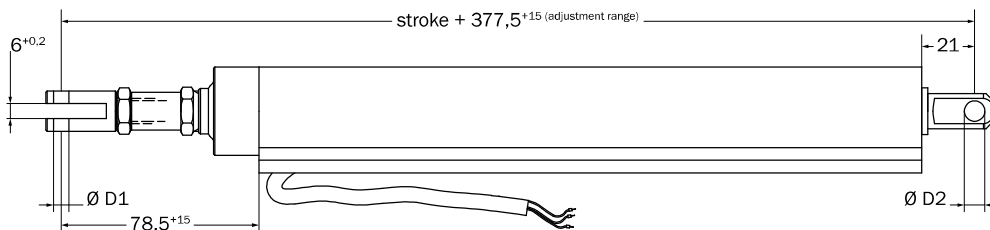

Order designation: JM-DC-B-SYN-load-stroke (- current) - M 10 GK Ø D 1 (top) Ø D 2 (bottom)
Example: JM-DC-B-SYN-650-750-M 10 GK Ø 6,1 GK Ø 6,1

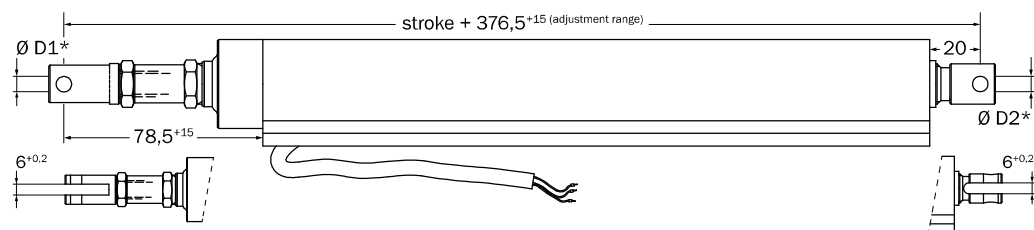

* The location holes D1 and D2 can be chosen between diameter 6.1 and 8.1.