




**Order designation:** JM-DC-SYN - load - stroke (- current) - Ø 6,1 or Ø 8,1 (Ø location hole)  
**Example:** JM-DC-SYN - 650 - 500 - Ø 6,1

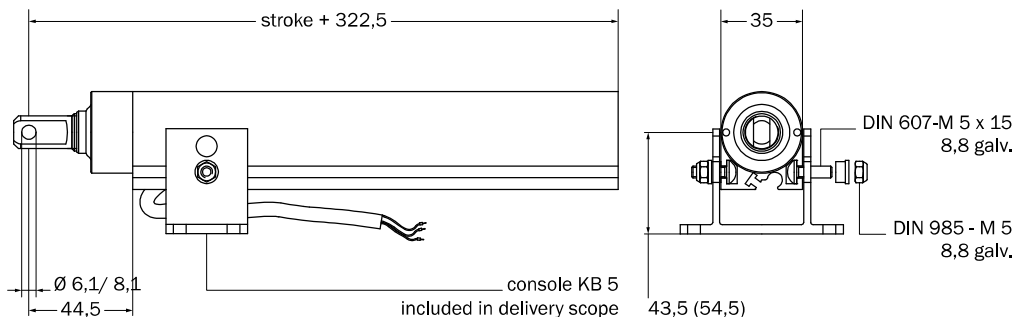


**Order designation:** JM-DC-SYN - load - stroke (- current) - M 8 Ø 6,1 or Ø 8,1 (Ø location hole)  
**Example:** JM-DC-SYN - 650 - 500 - M 8 Ø 6,1

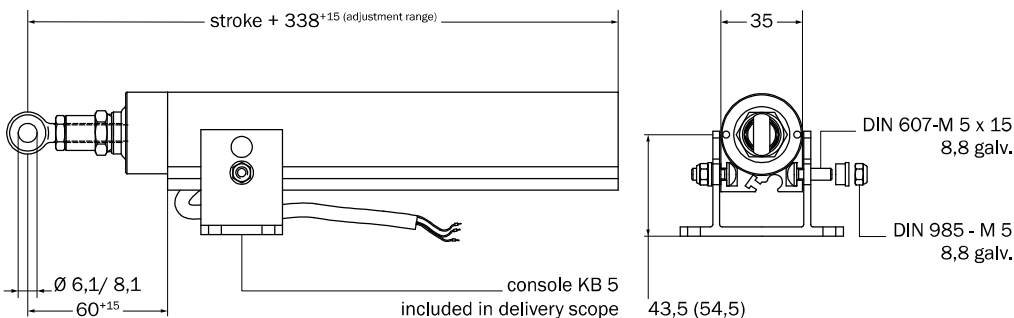

**Order designation:** JM-DC-SYN - load - stroke (- current) - M 10  
**Example:** JM-DC-SYN - 650 - 500 - M 10

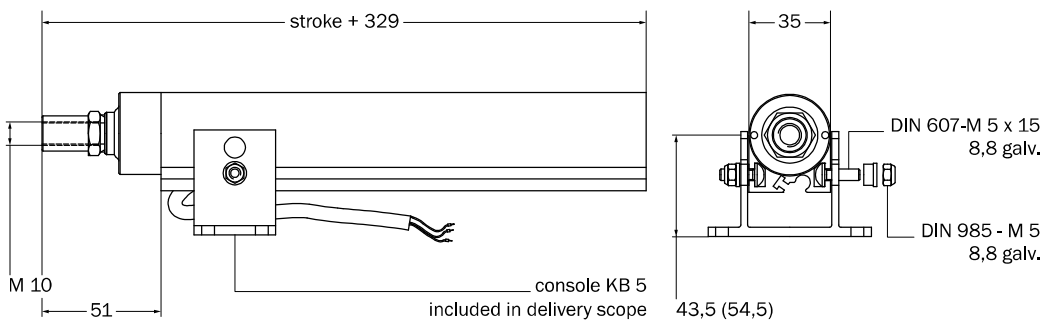

**Order designation:** JM-DC-SYN - load - stroke (- current) - GK  
**Example:** JM-DC-SYN - 650 - 500 - GK

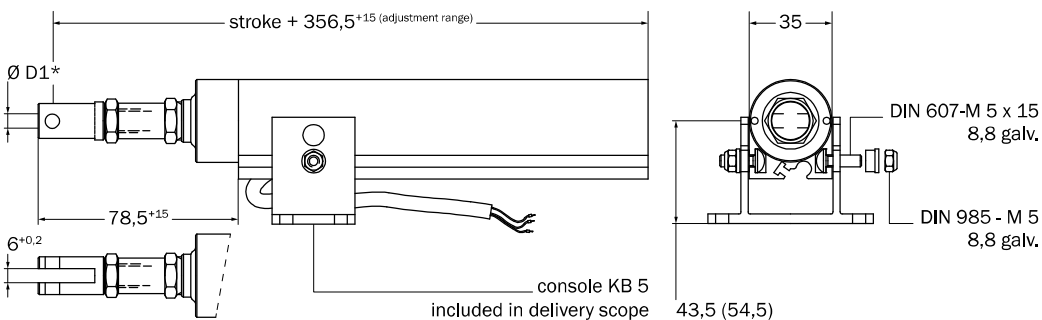

\* The location hole D1 can be chosen between diameter 6,1 or 8,1.