


INSTALLATION AND COMMISSIONING INSTRUCTION

NT-S-6,5

Power supply 230 V AC / 24 V DC, 6,5 A

NT-S-6,5 – Power supply 230 V AC / 24 V DC, 6,5 A

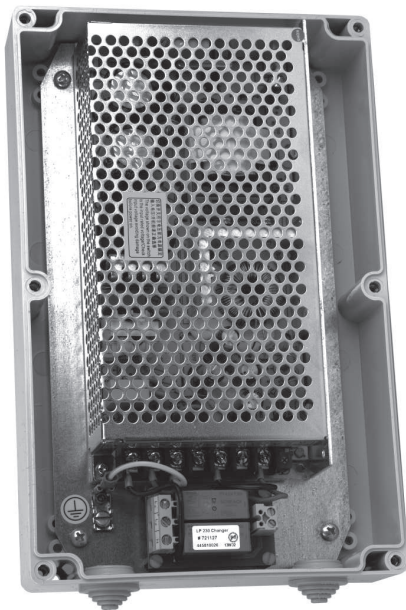

Part.-No.: 660007
Application: Switch mode power supply for the controlling of 24 V DC drives in one ventilation group.

Operating voltage: 230 V AC (195 – 253 V AC, 50/60 Hz)
Power consumption: 156 W

Output voltage: 24 V DC (2 Vpp)
Output current: 6,5 A

Duty ratio: ED30% (10 min)
Ambient temperature range: -5 °C ... +40 °C

Housing: Surface mounting, plastic (ABS)
Dimensions (WxHxD): 160 x 250 x 55 mm

Connection terminals: Screw terminals 4 mm² (rigid wire)
Protection rating: IP54

Feature:

- Control of OPEN / CLOSE with the 230 V AC power supply voltage.
- Max. 8 power supplies may be switched in parallel.



Only 24 V DC drives with integrated limit switches may be connected.

The Power supply is factory set to 230 V, 50 Hz.



The driving direction must correspond to the switched direction.

Note the pause duration on one second for direction change.



Warranty claims require proper and professional assembly, installation and maintenance in accordance with national regulations and manufacturer's instructions of the SHEV control unit.

The safety instructions in the supplied product documentation are to be observed.




Strictly observe the information given in this and in the instructions for installation of the SHEV control unit, when mounting the **Power supply NT-S-6,5**.

Details can be found on our website
www.aumueller-gmbh.de

Keep this instruction over the lifetime of the product.

Connection: NT-S-6,5 – Power supply 230 V AC / 24 V DC, 6,5 A

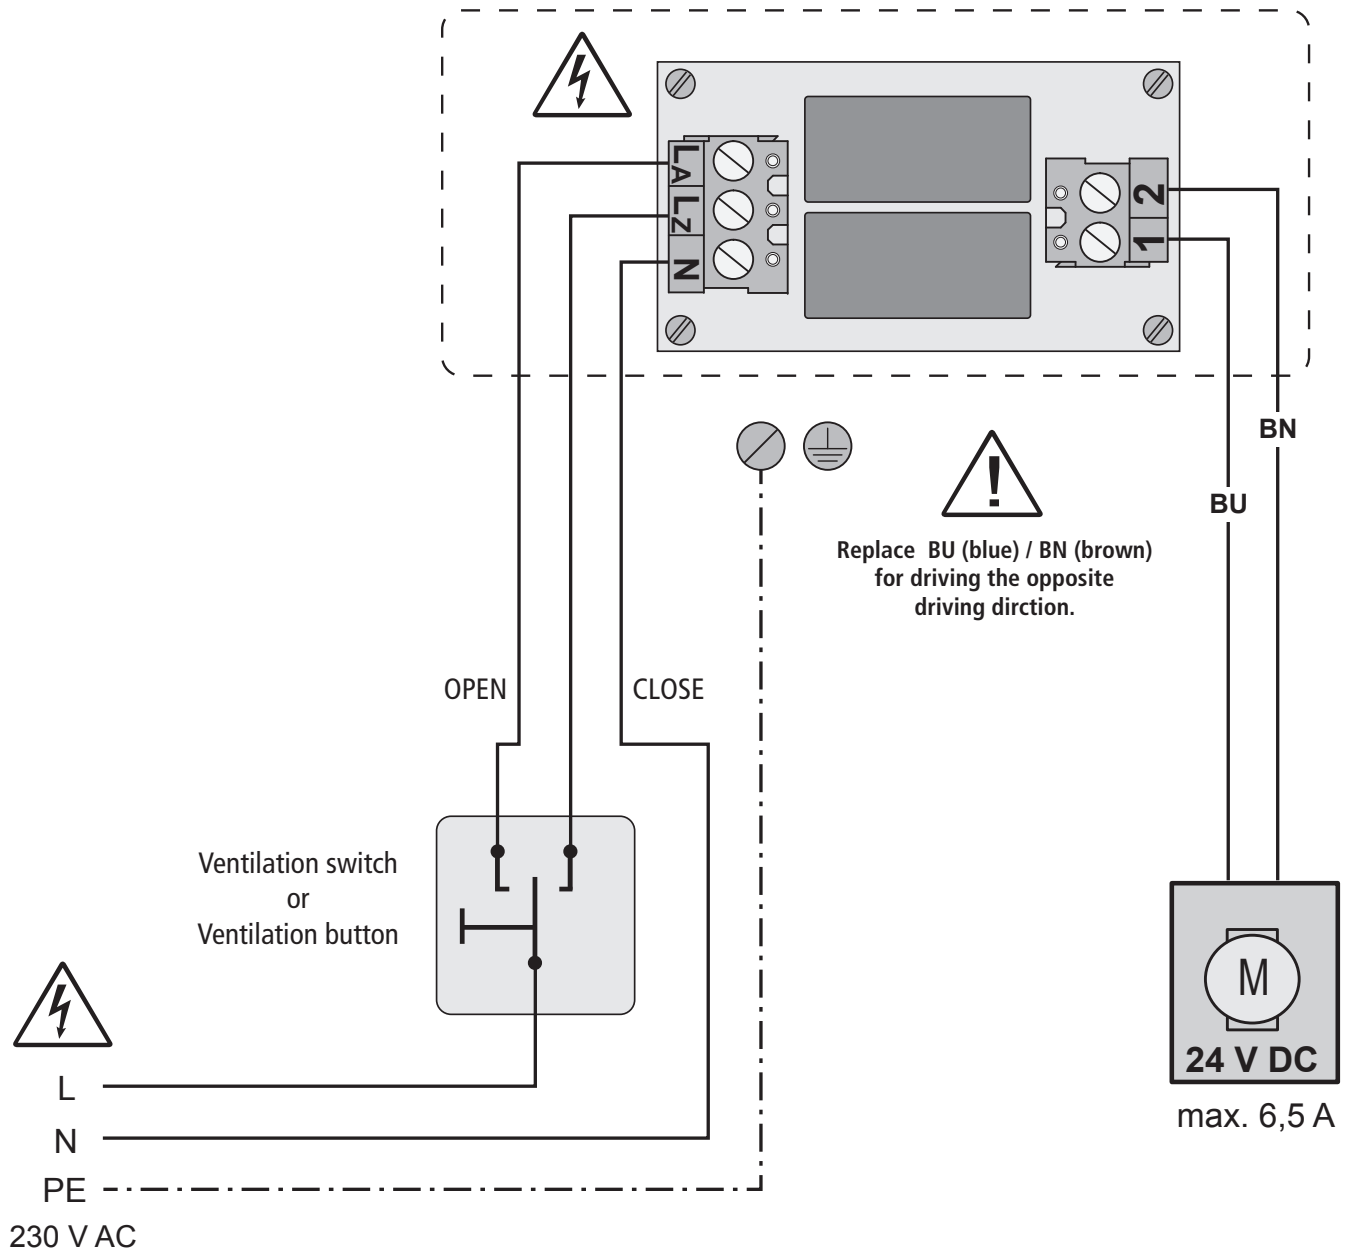

Colour	
BU =	blue
BN =	brown

www.aumueller-gmbh.de

AUMÜLLER AUMATIC GMBH
Gemeindewald 11
86672 Thierhaupten

Tel. +49 8271 8185-0
Fax +49 8271 8185-250
info@aumueller-gmbh.de