


Order designation: RV _/_-_/_
 Example: RV 02/6-01/6

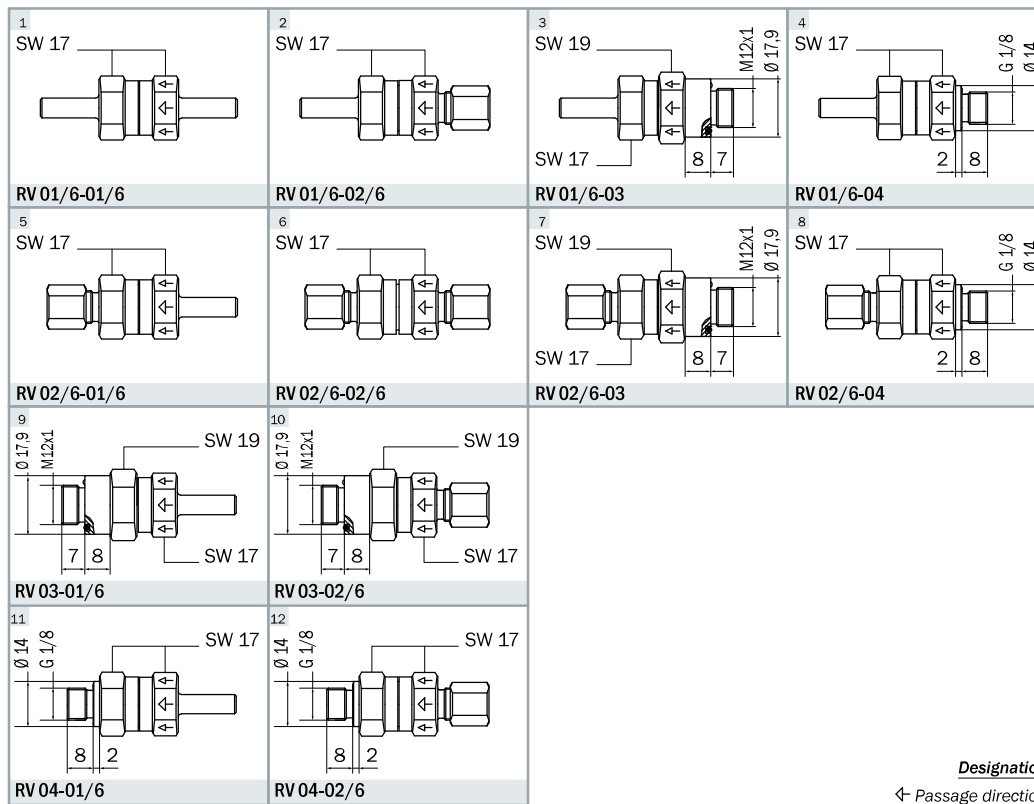

Short description

Check valves block completely the passage of compressed air or CO₂ in one direction. In the opposite direction the medium can flow through without throttling.


Technical data

nominal width	Ø 2,5
medium	a) filtered, dry and unoiled compressed air according to DIN ISO 8573-1 b) CO ₂
operating pressure	max. 60 bar
test pressure	90 bar
ambient temperature	-20 °C to +60 °C
operating temperature	according to VdS 2159 Temp.
materials	galvanized steel, brass, Perbunan
weight	ca. 60 g (according to type)

Connection type	Description
01	EGES (as pipe)
02	Union nut
03	M 12 x 1
04	G 1/8

Type codes

RV 02 / 6 - 01 / 6

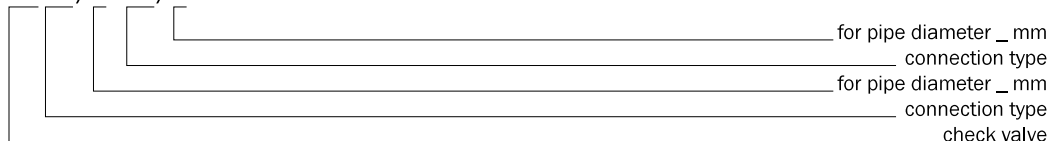

Instruction for order designation

Valves may also be simultaneously ordered as a reduced 8th to 6th pipe.
 Example: RV 02/8-01/6