



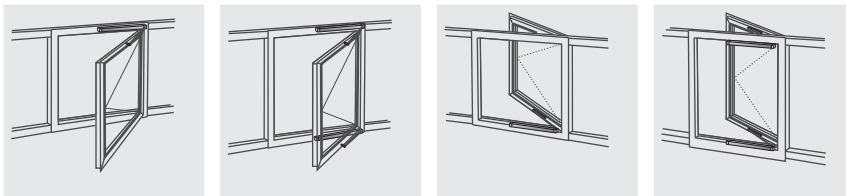
SPECIAL FEATURES FTA600

- For natural ventilation, smoke and heat exhausting systems and ferralux® NSHEV (EN12101-2)
- Type:
 - R – with role: The folding arm opens via role for air inlets at 90°
 - DF – with knuckle-joint for opening/closing of side hung inward opening windows at 90°
 - GF – with slide rail for opening/closing of side hung outward opening windows at 90°
- Opening time of 45 s for 90° opening angle
- Programmable voltage free contact
- Robust corrosion-resistant design
- Easy installation due to holes in the end caps of housing
- Programmable parameters of Internal Intelligent Control Electronics S12
 - Synchronised multi-operation and sequence control without add. devices
 - Electronic soft-start, soft-close and soft-stop at end of stroke control
 - Stroke, force, speed
 - Rebate control
- Integrated plug solution
- Suitable for M-COM for automatic synchronised run of multi drive systems and automatic sequence control with locking drives

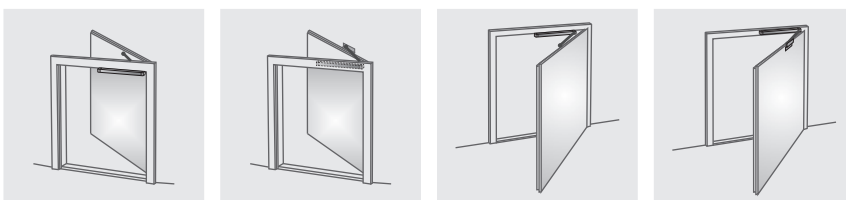
For this product series, a Type III Environmental Product Declaration (EPD) was issued according to ISO 14025 and EN 15804. The LCA results of the different product types are listed at the end of this product catalogue. The EPD documents can be viewed or downloaded from our homepage www.aumueller-gmbh.de.

FACADE


Side-hung (FTA600 DF/GF)

**INLET AIR**


Floor-to-ceiling windows (FTA600 R)

**ROOF**

Bottom-hung (FTA600 GF)



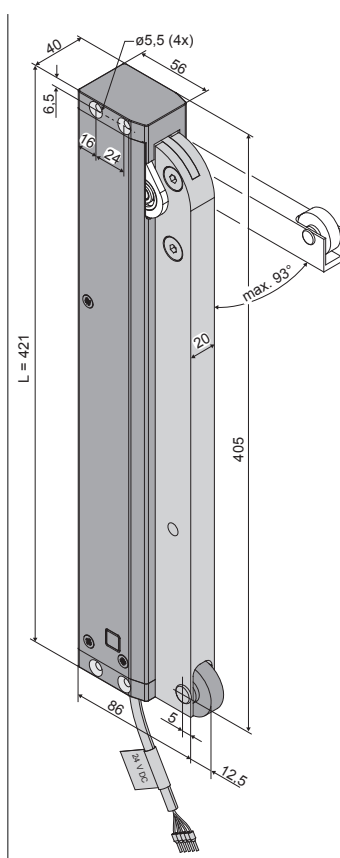
Sky-light (FTA600 GF)






- Application: natural ventilation, SHEV
- Mainly for supply air openings
- Internal Intelligent Control Electronics S12
- Programmable contact for opener
- Unified plug solution for all **AUMÜLLER** chain drives and **AUMÜLLER** folding arm drives

Options

- Programmable special functions
- M-COM for automatic synchronised run of multi drive systems and automatic sequence control with locking drives (S3 / S12)
- Various customised programmings on request





TECHNICAL DATA

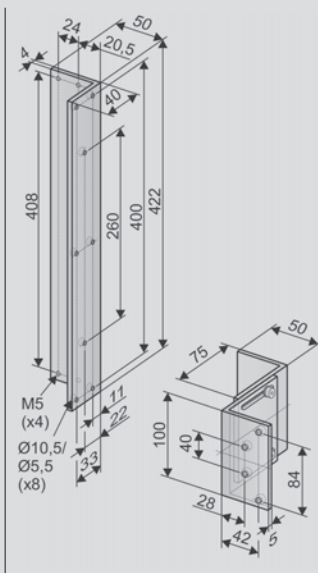
U_N	Rated voltage	24V DC (19 V ... 28 V)
I_N	Rated current	1,0 A
I_A	Cut-off current	1,4 A
P_N	Rated power	24 W
DC	Duty cycle	5 cycles (ED 30 % - ON: 3 min./OFF: 7 min.)
	Protection rating	IP 32
	Ambient temperature range	-5 °C ... +60 °C
M_A	Torque OPEN (max.)	215 Nm (~600 N)
M_Z	Torque CLOSE (max.)	215 Nm (~600 N)
F_H	Pullout force	3000 N (fastening depended)
	Lever arm	aluminium (RAL9006)
	Connecting cable	non-halogen, grey 5 x 0,5 mm ² , ~ 3 m
t	Running time (0° – 90°) (constant at 2/3 load)	 45 s (2,0°/s)  45 s (2,0°/s)
s	Stroke length (lever)	0 – 93 DEG (± 5%)
L	Length	421 mm
	Potential free contact	max. 24VDC / 0,5A programmable
	Sound pressure level	≤ 70 dB (A)

ORDER DATA						
s [DEG]	L [mm]	Version	Finish	PU/pcs.	Part.-No.	
0° – 93°	421	FTA600 R S12 24V	E6/C-0	1	524144	
Accessories				PU/pcs.	Part.-No.	
K88 Casement bracket FTA600 R				1	524156	
OPTIONS						
Special model				PU/pcs.	Part.-No.	
Drive housing painted/powder coated in other RAL colours						
Lump sum for coating					516030	
Specify at order stage:				1 – 20	516004	
				21 – 50	516004	
				51 – 100	516004	
				from 101	516004	
Microprocessor programming S12						
Electronic stroke reduction 24V S12				1	524190	
Programming drives 24V / 230V S12					524180	
Optional accessories				PU/pcs.	Part.-No.	
Configuration module for synchronised multi-drive systems				1	524177	

OPTIONAL ACCESSORIES

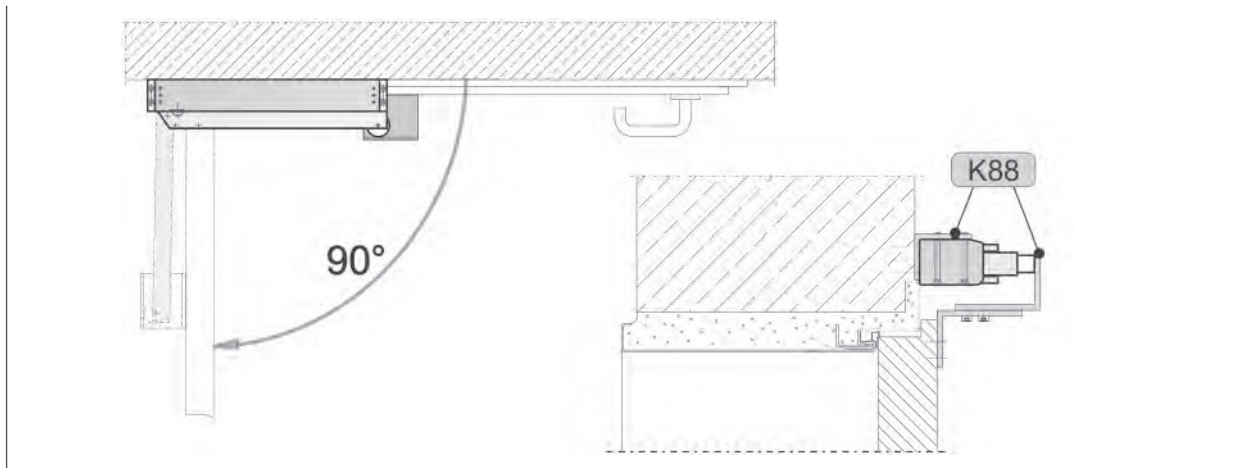
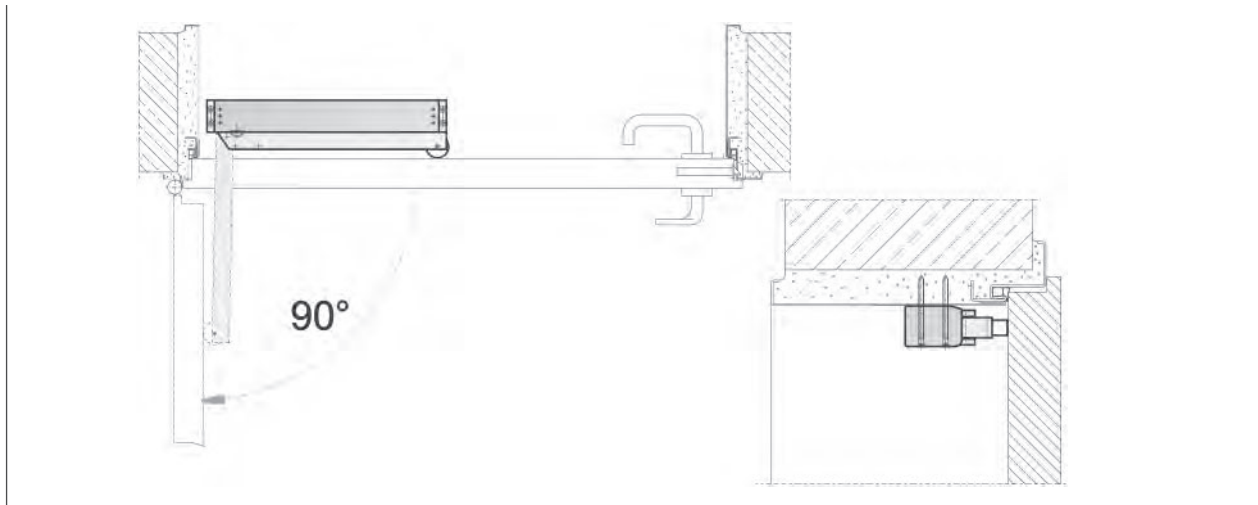
Main control unit and plug solution						
M-COM		Application	Part.-No. 524177			
		Configuration module for automatic configuration and surveillance of max. 4 opening drives / 2 locking drives version S12 / S3 in synchronised multi-drive systems	Ambient temperature range 0 °C ... + 70 °C			
		Rated voltage: 24V DC (19 V ... 28 V)	Dimensions 45 x 17 x 6 mm			
		Current consumption: <12 mA	Connecting wires 3 wires 0,5 mm ² x 50 mm			
		Drive type: S12	Feature/Equipment			
		Protection rating IP30 rubber envelope	Printed circuit board with components and connection wires to be installed in connection box to be supplied on site			
Aumüller-Click plug solution		Aumüller-Click plug solution:	Feature/Equipment			
		Unified plug solution for all AUMÜLLER chain drives and AUMÜLLER folding arm drives.	<ul style="list-style-type: none">Flexible cable lengthConnect multiple drives in series connectionTorsion-plugLocking hooks prevent withdrawal of the plug under tensile loadStrain relief according DIN EN 60335-1 by screwing the housing halves			
		Rated voltage: 24V DC (19 V ... 28 V)				
		Connecting cable: non-halogen, grey 5 x 0,5 mm ²				
		Terminal: to 1,5 mm ²				
VARIANTS:						
		3 m cable length - 24 V DC	Part.-No. 501251			
		5 m cable length - 24 V DC	Part.-No. 501252			
		10 m cable length - 24 V DC	Part.-No. 501253			

OPTIONAL ACCESSORIES

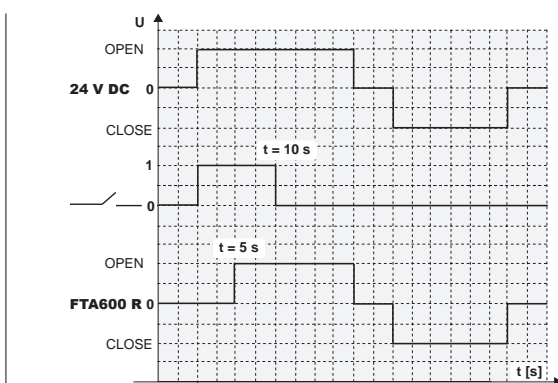
Casement bracket						
K88		<p>Application</p> <p>Surface mounting on the side closing edge of frame profiles of inward opening floor-to-ceiling windows as air inlets.</p> <p>Angle bracket 422 mm for mounting of FTA600-R on the frame profile.</p> <p>Two angle brackets 100 mm for mounting on the floor-to-ceiling windows as sliding guidance of the carrier role, adjustable for compensation of the overlap.</p>	<p>Part.-No. 524156</p> <p>Material/Finish aluminium</p> <p>Feature/Equipment 1x angle 50x40x422 (t = 4) mm 2x angles 50x75x100 (t = 5) mm fixing screws and nuts</p> <p>Load max. 600 N</p>			

Special model	PU/pcs.	Part.-No.			
Frame brackets painted / powder coated in other RAL colours					
Lump sum for coating		516030			
Specify at order stage:	1 – 20	516031			
	21 – 50	516031			
	51 – 100	516031			
	from 101	516031			

Typical applications



Contact diagramm



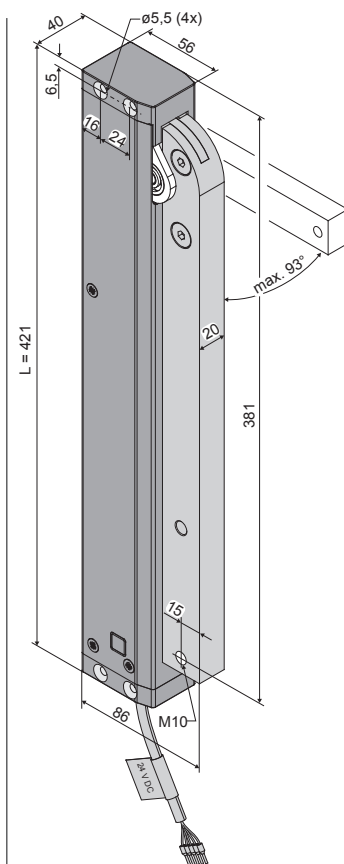
After application of the voltage, the floor-to-ceiling windows lock contact is activated for 10 seconds. With a delay of about 5 seconds, the drive arm of the folding arm drives **FTA600 R** starts moving and opens to an angle of max. 93°.

During the **closing operation**, the floor-to-ceiling window lock contact is not activated.




- Application: natural ventilation, SHEV
- Mainly for opening and closing of side-hung inward opening windows
- Internal Intelligent Control Electronics S12
- Programmable contact for feedback
- Unified plug solution for all **AUMÜLLER** chain drives and **AUMÜLLER** folding arm drives

Options

- Programmable special functions
- M-COM for automatic synchronised run of multi drive systems and automatic sequence control with locking drives (S3 / S12)
- Various customised programmings on request





TECHNICAL DATA

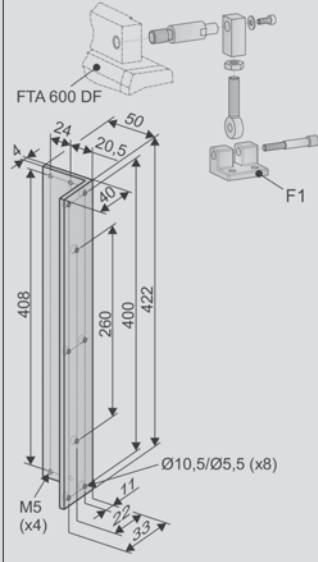
U_N	Rated voltage	24V DC (19V ... 28V)
I_N	Rated current	1,0 A
I_A	Cut-off current	1,4 A
P_N	Rated power	20 W
DC	Duty cycle	5 cycles (ED 30 % - ON: 3 min./OFF: 7 min.)
	Protection rating	IP 32
	Ambient temperature range	-5 °C ... +60 °C
M_A	Torque OPEN (max.)	215 Nm (~600 N)
M_Z	Torque CLOSE (max.)	215 Nm (~600 N)
F_H	Pullout force	3000 N (fastening depended)
	Lever arm	aluminium (RAL9006)
	Connecting cable	non-halogen, grey 5 x 0,5 mm ² , ~ 3 m
t	Running time (0° – 90°) (constant at 2/3 load)	 45 s (2,0°/s)  45 s (2,0°/s)
s	Stroke length (lever)	0 – 93 DEG (± 5%)
L	Length	421 mm
	Potential free contact	max. 24VDC / 0,5A programmable
	Sound pressure level	≤ 70 dB (A)

ORDER DATA						
s [DEG]	L [mm]	Version	Finish	PU/pcs.	Part.-No.	
0° – 93°	421	FTA600 DF S12 24V	E6/C-0	1	524145	
Accessories				PU/pcs.	Part.-No.	
K103 Casement bracket FTA600 DF				1	524172	
OPTIONS						
Special model				PU/pcs.	Part.-No.	
Drive housing painted/powder coated in other RAL colours						
Lump sum for coating					516030	
Specify at order stage:				1 – 20	516004	
				21 – 50	516004	
				51 – 100	516004	
				from 101	516004	
Microprocessor programming S12						
Electronic stroke reduction 24V S12				1	524190	
Programming drives 24V / 230V S12					524180	
Optional accessories				PU/pcs.	Part.-No.	
Configuration module for synchronised multi-drive systems				1	524177	

OPTIONAL ACCESSORIES

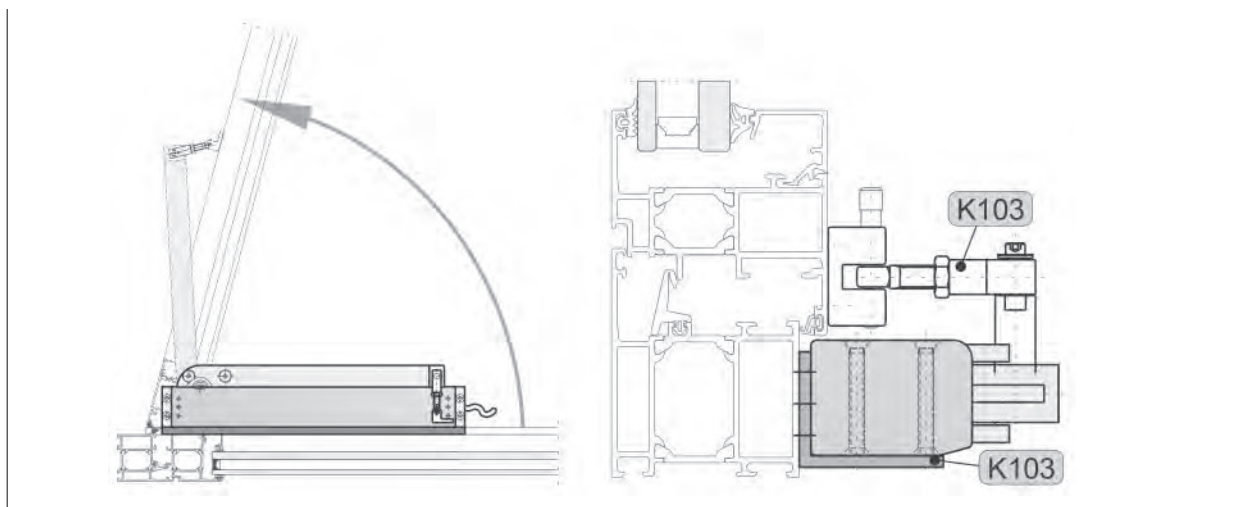
Main control unit and plug solution				
M-COM		Application Configuration module for automatic configuration and surveillance of max. 4 opening drives / 2 locking drives version S12 / S3 in synchronised multi-drive systems Rated voltage: 24V DC (19V ... 28 V) Current consumption: <12 mA Drive type: S12 Protection rating IP30 rubber envelope	Part.-No. 524177 Ambient temperature range 0 °C ... + 70 °C Dimensions 45 x 17 x 6 mm Connecting wires 3 wires 0,5 mm² x 50 mm Feature/Equipment Printed circuit board with components and connection wires to be installed in connection box to be supplied on site	
Aumüller-Click plug solution		Aumüller-Click plug solution: Unified plug solution for all AUMÜLLER chain drives and AUMÜLLER folding arm drives. Rated voltage: 24V DC (19V ... 28 V) Connecting cable: non-halogen, grey 5 x 0,5 mm² Terminal: to 1,5 mm²	Feature/Equipment <ul style="list-style-type: none">Flexible cable lengthConnect multiple drives in series connectionTorsion-plugLocking hooks prevent withdrawal of the plug under tensile loadStrain relief according DIN EN 60335-1 by screwing the housing halves	
		VARIANTS:		
		3 m cable length - 24 V DC	Part.-No. 501251	
		5 m cable length - 24 V DC	Part.-No. 501252	
		10 m cable length - 24 V DC	Part.-No. 501253	

ACCESSORIES

Casement bracket			
K103		<p>Application</p> <p>Surface mounting on the side closing edge of window frame profiles of inward opening side-hung windows.</p> <p>Angle bracket 422 mm for mounting of FTA600-DF on the window frame profile.</p> <p>F1 for mounting on the casement profile and for the fixing with the knuckle joint, adjustable for compensation of the overlap.</p>	<p>Part.-No. 524172</p> <p>Material/Finish aluminium</p> <p>Feature/Equipment 1x angle 50x40x422 (t = 4) mm 1x casement bracket F1 1x fixing accessories</p> <p>Load max. 600 N</p>

Special model	PU/pcs.	Part.-No.			
Frame brackets painted / powder coated in other RAL colours					
Lump sum for coating		516030			
Specify at order stage:	1 – 20	516031			
	21 – 50	516031			
	51 – 100	516031			
	from 101	516031			

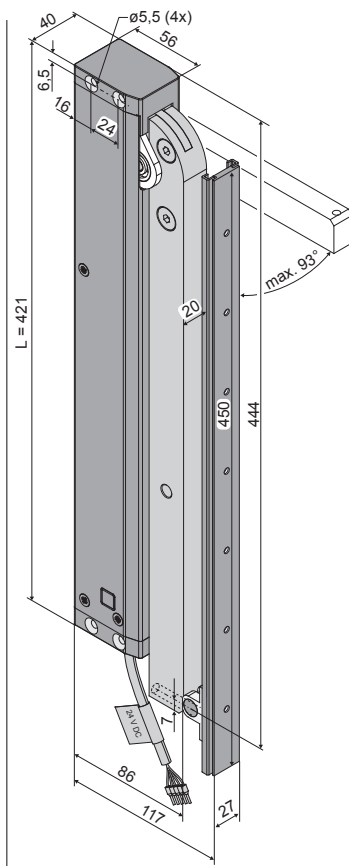
Typical applications





- Application: natural ventilation, SHEV
- Mainly for opening and closing of side-hung outward opening windows
- Internal Intelligent Control Electronics S12
- Programmable contact for feedback
- Unified plug solution for all **AUMÜLLER** chain drives and **AUMÜLLER** folding arm drives

Options

- Programmable special functions
- M-COM for automatic synchronised run of multi drive systems and automatic sequence control with locking drives (S3 / S12)
- Various customised programmings on request





TECHNICAL DATA

U_N	Rated voltage	24V DC (19 V ... 28 V)
I_N	Rated current	1,0 A
I_A	Cut-off current	1,4 A
P_N	Rated power	20 W
DC	Duty cycle	5 cycles (ED 30 % - ON: 3 min./OFF: 7 min.)
	Protection rating	IP 32
	Ambient temperature range	-5 °C ... +60 °C
M_A	Torque OPEN (max.)	215 Nm (~ 600 N)
M_Z	Torque CLOSE (max.)	215 Nm (~ 600 N)
F_H	Pullout force	3000 N (fastening depended)
	Lever arm	aluminium (RAL9006)
	Connecting cable	non-halogen, grey 5 x 0,5 mm ² , ~ 3 m
t	Running time (0° – 90°) (constant at 2/3 load)	 45 s (2,0°/s)  45 s (2,0°/s)
s	Stroke length (lever)	0 – 93 DEG (± 5%)
L	Length	455 mm
	Potential free contact	max. 24VDC / 0,5A programmable
	Sound pressure level	≤ 70 dB (A)

ORDER DATA						
s [DEG]	L [mm]	Version	Finish	PU/pcs.	Part.-No.	
0° – 93°	455	FTA600 GF S12 24V	E6/C-0	1	524146	
Accessories				PU/pcs.	Part.-No.	
K104 Casement bracket FTA600 GF				1	524173	
OPTIONS						
Special model				PU/pcs.	Part.-No.	
Drive housing painted/powder coated in other RAL colours						
Lump sum for coating					516030	
Specify at order stage:				1 – 20	516004	
				21 – 50	516004	
				51 – 100	516004	
				from 101	516004	
Microprocessor programming S12						
Electronic stroke reduction 24V S12				1	524190	
Programming drives 24V / 230V S12					524180	
Optional accessories				PU/pcs.	Part.-No.	
Configuration module for synchronised multi-drive systems				1	524177	

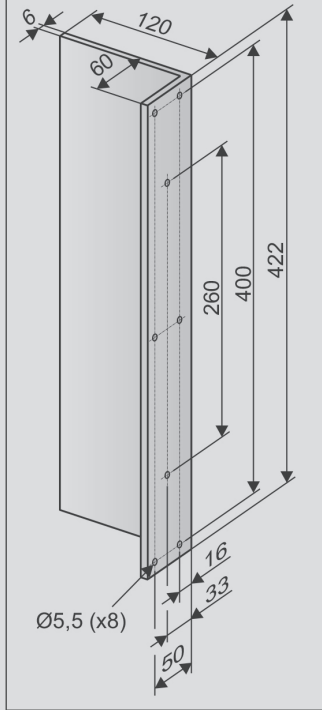
OPTIONAL ACCESSORIES

Main control unit and plug solution				
M-COM		Application Configuration module for automatic configuration and surveillance of max. 4 opening drives / 2 locking drives version S12 / S3 in synchronised multi-drive systems Rated voltage: 24V DC (19V ... 28 V) Current consumption: <12 mA Drive type: S12 Protection rating IP30 rubber envelope	Part.-No. 524177 Ambient temperature range 0 °C ... + 70 °C Dimensions 45 x 17 x 6 mm Connecting wires 3 wires 0,5 mm² x 50 mm Feature/Equipment Printed circuit board with components and connection wires to be installed in connection box to be supplied on site	
Aumüller-Click plug solution		Aumüller-Click plug solution: Unified plug solution for all AUMÜLLER chain drives and AUMÜLLER folding arm drives. Rated voltage: 24V DC (19V ... 28 V) Connecting cable: non-halogen, grey 5 x 0,5 mm² Terminal: to 1,5 mm²	Feature/Equipment <ul style="list-style-type: none">Flexible cable lengthConnect multiple drives in series connectionTorsion-plugLocking hooks prevent withdrawal of the plug under tensile loadStrain relief according DIN EN 60335-1 by screwing the housing halves	
		VARIANTS:		
		3 m cable length - 24 V DC	Part.-No. 501251	
		5 m cable length - 24 V DC	Part.-No. 501252	
		10 m cable length - 24 V DC	Part.-No. 501253	

ACCESSORIES

Casement bracket

K104



Application

Surface mounting on the side closing edge of window frame profiles of outward opening side-hung windows.

Angle bracket 422 mm for mounting of FTA600-GF on the window frame profile.

The slide rail of has to be mounted on the casement profile.

Part.-No. 524173

Material/Finish
aluminium

Feature/Equipment

1x angle 120x60x422

(t = 6) mm

4x countersunk screws,

M5x45 mm

Load

max. 600 N

Special model	PU/pcs.	Part.-No.			
Frame brackets painted / powder coated in other RAL colours					
Lump sum for coating		516030			
Specify at order stage:	1 – 20	516031			
	21 – 50	516031			
	51 – 100	516031			
	from 101	516031			

ATTENTION: Slide rail may not be painted!

Typical applications

