
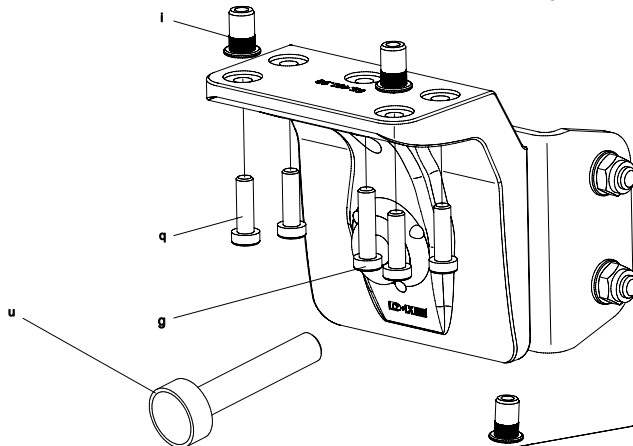



DXD-BS001-SM (-WS)



* Ausführung "-WS" für den Einsatz Schwimmbädern
version "-WS" for mounting in indoor swimming pools

Technische Änderungen vorbehalten.
Rights to technical modifications reserved.

© 2007 D+H Mechatronic AG, Ammersbek
Alle Maße in Millimeter. All sizes in millimetre.

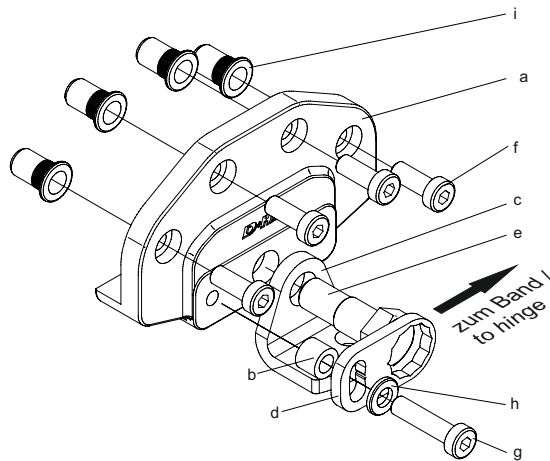

Abstützung / Support spindle
Länge / length 75mm

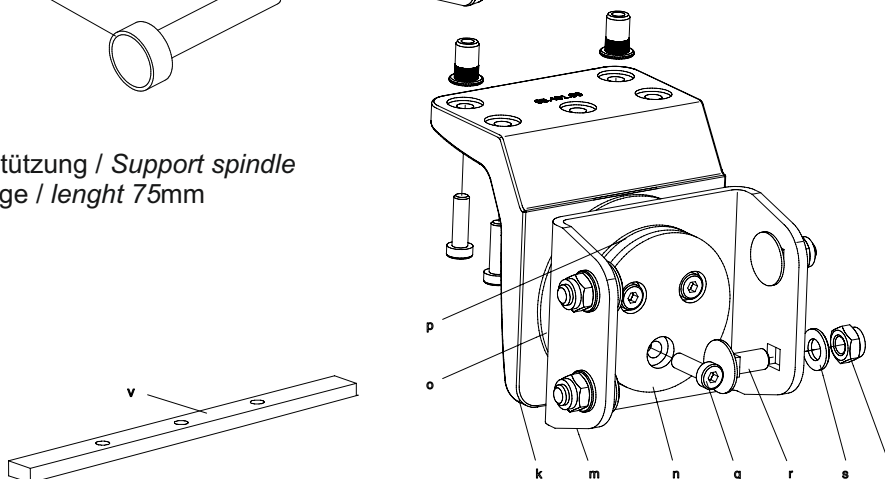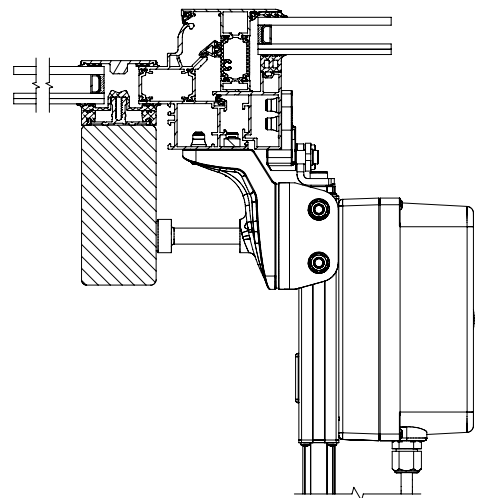

- | | |
|--------------------------------|------------------------------------|
| a 1x Flügelkonsole | n 1x Konsolenachse |
| b 1x Distanzhülse | o 1x Anlaufscheibe |
| c 1x Konsolenwinkel | p 1x Gleitlager |
| d 1x Sicherungsblech | q 7x Schraube M6x20 |
| e 1x Paßschraube | r 4x Flachrundschrabe M8x20 |
| f 4x Schraube M6x16 | s 4x U-Scheibe 8mm |
| g 2x Schraube M6x25 | t 4x Mutter selbsts. M8 |
| h 1x U-Scheibe 6mm | u 1x Abstützung |
| i 9x Blindnietmutter M6 | v 1x Gewindeplatte |
| k 1x Adapterwinkel | |
| m 1x Rahmenkonsole | |

- | | |
|--------------------------------|------------------------------------|
| a 1x sash bracket | n 1x bracket axle |
| b 1x spacer bush | o 1x thrust washer |
| c 1x angle bracket | p 1x friction bearing |
| d 1x safety plate | q 7x screw M6x20 |
| e 1x dowel plate | r 4x round head screw M8x20 |
| f 4x screw M6x16 | s 4x plain washer 8mm |
| g 2x screw M6x25 | t 4x self-locking nut M8 |
| h 1x plain washer 6mm | u 1x support spindle |
| i 9x blind rivet nut M6 | v 1x thread plate |
| k 1x adapter angle | |
| m 1x frame bracket | |

Vor Montagebeginn bitte unbedingt die profilspezifischen Montagehinweise gemäß D+H Anwendungszeichnung beachten.

Before mounting, the profile specific mounting instructions in the D+H application drawings must be taken into account.