



Flush frames

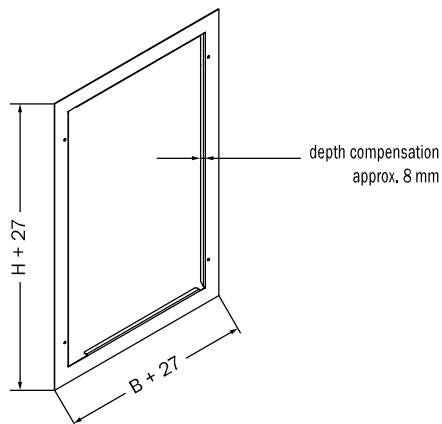

Smash hammer

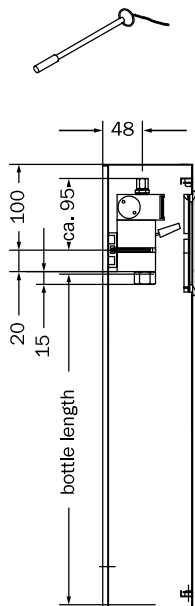

Onto the box floor a mounting rail is screwed, in which the required quantity of threaded nuts can be inserted for the fastening of the units. In the corner of the box floor fixation bores are provided with a Ø of 6,5. When using this as a flush-mounted box the illustrated "flush-mounted frame" including filister head sheet metal screw 3,5 x 9,5 DIN 7973 is delivered.

The glass of the viewing window has a strength of approx. 1 mm and can be pressed in or hammered in.

Short description

Technical data

Box dimensions	Box size	
	H [mm]	W [mm]
1	345	255
2	440	255
3	520	335
4	520	560
5	700	335
6	700	560

Material	Sheet metal, optional Niro sheet metal 1.4301, painted with structure-full tone-paint RAL 3 000 (flame red)
----------	---

CO ₂ -Bottles	max. L [mm]	min. box dimensions
18 g	145	1
33 g	210	1
140 g	280	2
300 g	330	3
20 g	162	1
25 g	162	1
40 g	181	1
55 g	227	2
60 g	165	1
80 g	297	2
120 g	297	2
135 g	174	1
140 g	280	2
175 g	262	2
300 g	330	3
500 g	360	3
750 g	305	3
1000 g	382	3
1500 g	505	5/6

CO₂-bottles and glass bulbs

→see also chapter 01, page 10, "CO₂-Bottles and Glass Bulbs" and price list chapter 01