




Order designation: JM-DC-B-load-stroke (- current) - M 8 / Ø D 1 (top) Ø D 2 (bottom)
Example: JM-DC-B-650-500-M 8 Ø 6,1 Ø 6,1

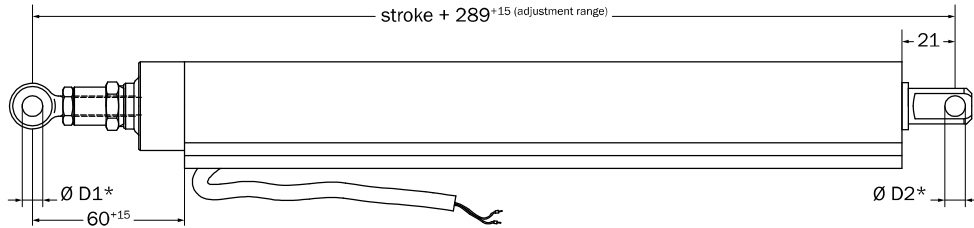


Order designation: JM-DC-B-load-stroke (- current) - M 8 / Ø D 1 (top) M 8 Ø D 2 (bottom)
Example: JM-DC-B-650-500-M 8 Ø 6,1 M 8 / Ø 6,1

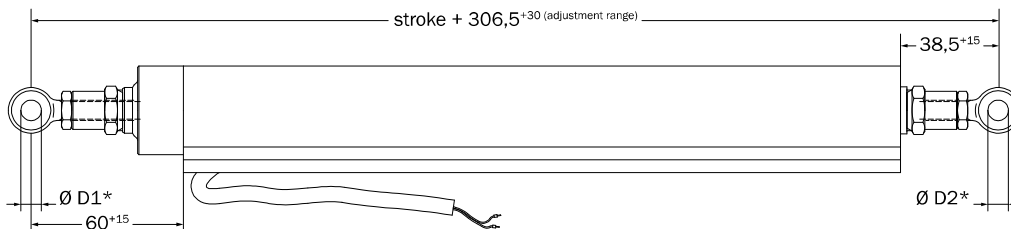


Order designation: JM-DC-B-load-stroke (- current) - M 10 (top) Ø D 2 (bottom)
Example: JM-DC-B-650-500-M 10 Ø 6,1

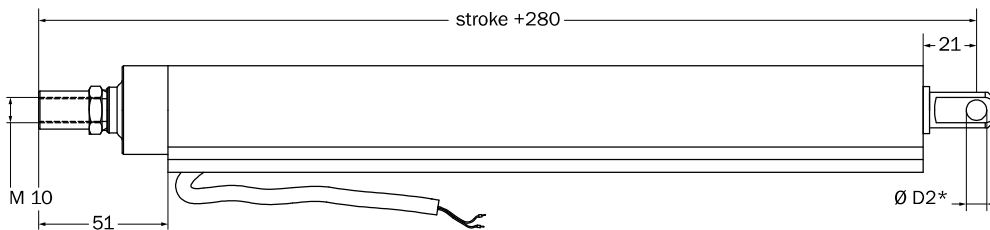

Order designation: JM-DC-B-load-stroke (- current) - M 10 GK Ø D 1 (top) Ø D 2 (bottom)
Example: JM-DC-B-650-500-M 10 GK Ø 6.1 Ø 8.1

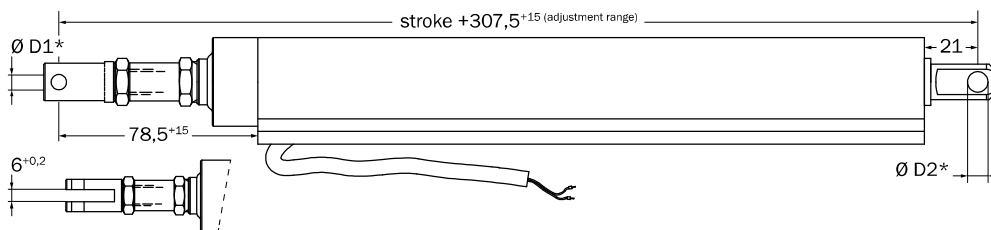

Order designation: JM-DC-B-load-stroke (- current) - M 10 GK Ø D 1 (top) GK Ø D 2 (bottom)
Example: JM-DC-B-650-500-M 10 GK Ø 6.1 GK Ø 8.1

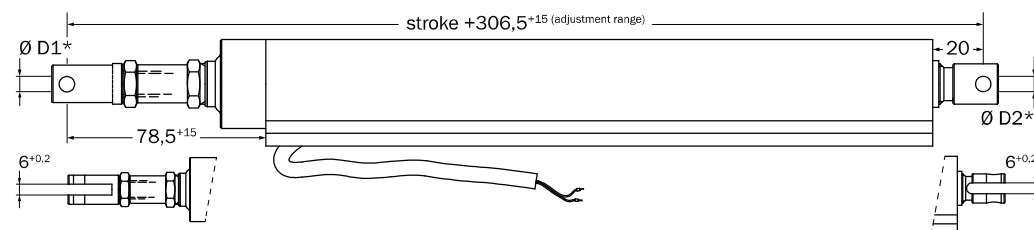

* The location holes D1 and D2 can be chosen between diameter 6,1 and 8,1.