

CAT

Manual chain opener



- Manual chain operator for skylights, roof windows and top hinged windows.
- Easy and quick installation on wood, metal and PVC windows.
- Maximum opening approx. 280 mm. It is possible to stop the sash in any position.
- Allows window operation without remove any insect screen.
- When closed it is not possible to open the window from outside.
- Smooth and easy operation.
- Quick release system for easy window cleaning.
- Corrosion protected chain. Suitable for windows with more than 300 mm height.
- The CAT chain actuator can be equipped with a handle for installation on windowsill or eyelet for operation by crank handle for skylights or roof windows.

PART No.

CAT CHAIN OPENER

HANDLE

EYELET

CRANK HANDLE

Lenght

WHITE RAL 9010

40761B

40763D

40762C

1500 mm

2000 mm

2500 mm

3000 mm

BLACK RAL 9005

40807V

40811Z

40809X

40764E

40765F

40766G

40767H

GREY RAL 9006


40808W

40812A

40810Y

SPECIFICATION PROSPECTS

Ultraflex Control Systems manual actuator with chain for operating top hinged windows by handle or skylights by eyelet and crank handle. Maximum stroke 280 mm.

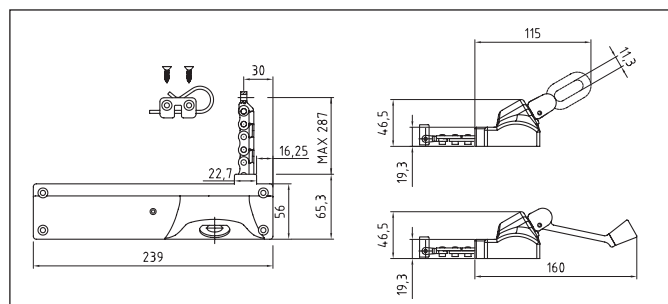

Actuator dimension

Vent maximum weight for CAT installation:

Top hinged windows

8 Kg	if the vent height is	300 mm
22 Kg	if the vent height is	400 mm
48 Kg	if the vent height is	600 mm
100 Kg	if the vent height is	1000 mm

Roof windows or skylights

35 Kg maximum weight with 280 mm stroke.

Please contact technical service for further informations.

The above values do not include any wind or snow load.



The instructions for a safe installation are included in the section "SECURITY WARNINGS"