ENTRAPMENT PROTECTION SYSTEMS EPS


Power actuated window protection system



EPS Entrapment Protection System provides protection to people close to the automated window area, also for children or people with reduced attention and response capacity, above all in case of accessible windows or with automatic control without visual contact.

The infra-red active sensor, or other presence sensor, gives a signal to the control unit in case of foreign presence; the EPS system reverses the closing movement for 3 seconds to release possible objects or body parts entrapped in the window, then stops the power to the actuator.

EPS can also provide the visual and acoustic signal in case of intervention of the presence sensor; moreover it is possible to continue the closing action as soon as the foreign presence disappears. It is possible to connect more than one actuator and/or sensor to the control unit.

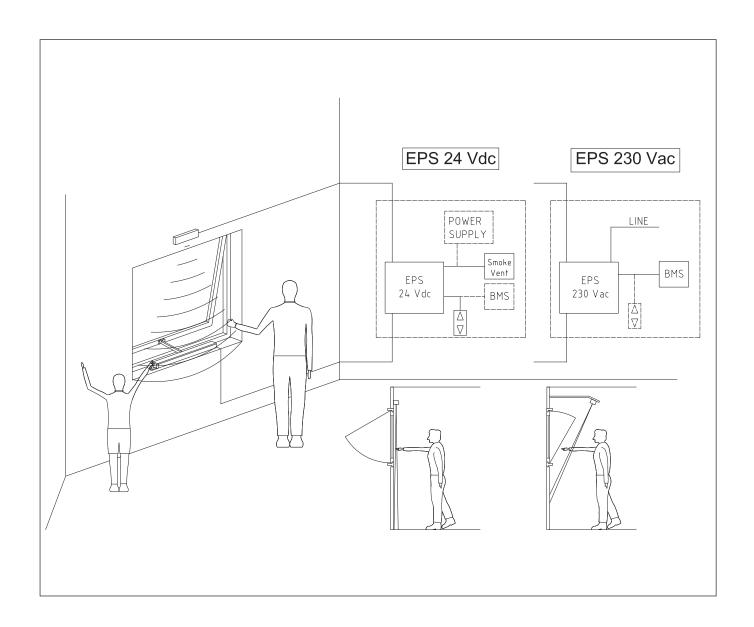

↑ The instructions for a safe installation are included in the section "SECURITY WARNINGS"



EPS 24 VdcPART No. 41342I
Control unit for 24 Vdc actuators. Inputs: feeder; EFC control panel; push button or BMS system. Dimensions: 115 x 155 x 75 mm

EPS 230 Vac

PART No. 41341H
Control unit for 230 Vac actuators. Inputs: line – push button or BMS system. Dimensions: 115 x 155 x 75 mm



PRESENCE SENSOR
PART No. 41343J
The infra-red presence sensor gives a signal to the EPS control unit in case of foreign presence Dimensions: 221 X 63 X 30 mm

For information about C-SV control panels and CRM control panels, see the related sections; for power supply and push button, see CONTROL ACCESSORIES section.