




Order designation: JM-DC - load - stroke (- current) Ø 6,1 or Ø 8,1 (Ø location hole)
Example: JM-DC - 650 - 500 Ø 6,1

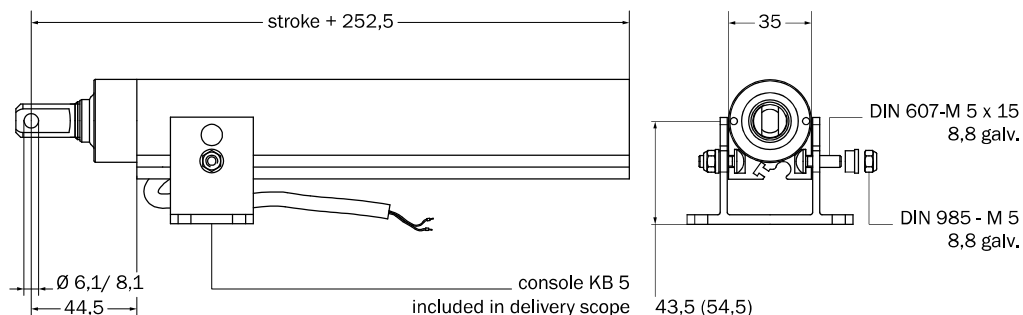


Order designation: JM-DC - load - stroke (- current) M 8 Ø 6,1 or Ø 8,1 (Ø location hole)
Example: JM-DC - 650 - 500 M 8 Ø 6.1

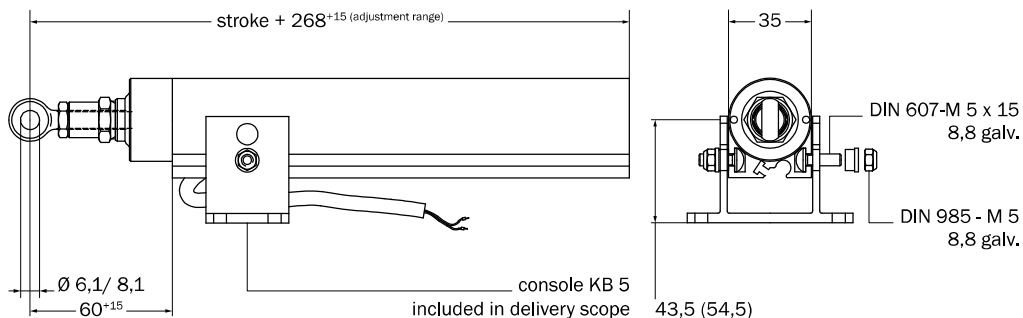

Order designation: JM-DC - load - stroke (- current) - M 10
Example: JM-DC - 650 - 500 - M 10

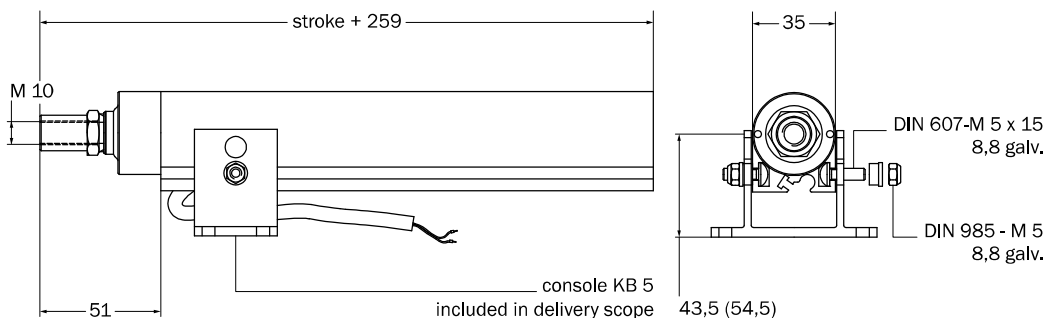

Order designation: JM-DC - load - stroke (- current) - GK
Example: JM-DC - 650 - 500 - GK

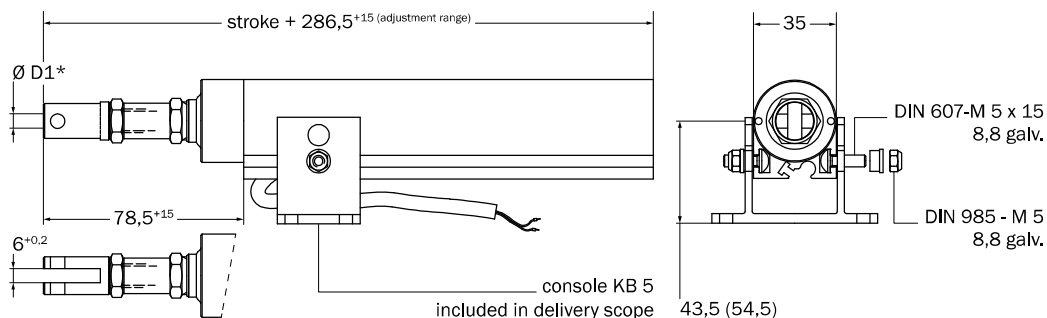

* The location hole
 D1 can be chosen between
 diameter 6,1 or 8,1.