

## Pressure gas generator (pyrotechnic) DE

### Short description

Due to the ignition of the DE-actuation the glass is broken and the TAG is actuated.


### Technical data

(Order designation)	DE
lead wire	0,5 mm <sup>2</sup>
ignition impulse	no ignition < 180 mA safe ignition as of 0,6 A
measured current	max. 10 mA
operating voltage	24 Volt DC
particularity	after each activation this unit should be fully replaced



Pressure gas generator have a duty cycle of 3 years. The manufacturing date is printed on each item.

After use, the complete unit including the release-cylinder should be replaced.

**For this item we do not accept any liability!**

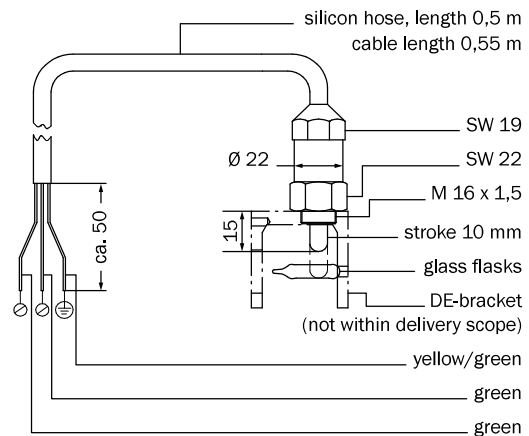

## Electric signal contact EMK 16 x 1.5

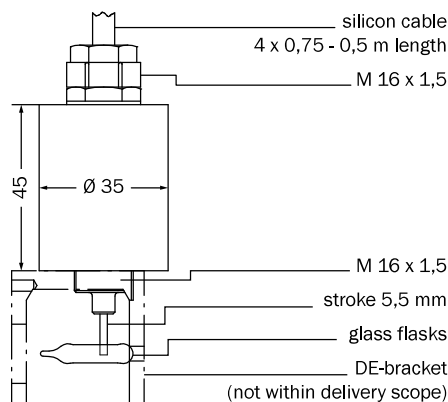

### Short description

When the glass bulb is broken, the TAG is actuated and the quiescent current monitored signal line is interrupted.

### Technical data

(Order designation)	EMK 16x1,5
switching capacity	5 A, 250 V; AC 1
nominal isolation voltage	750 V
isolation	IP 40
materials	aluminum, niro, brass
weight	85 g
ambient temperature	-20 °C to +110 °C