



CHECK VALVE NW 15 TO 40

Order designation: RV nominal width
 Example: RV 20

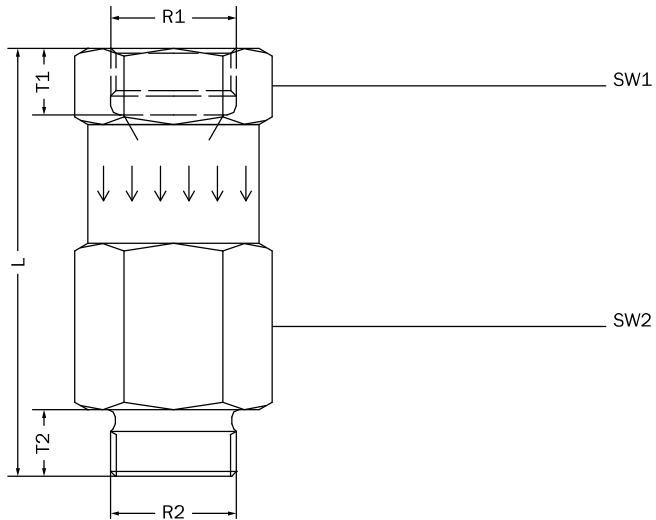

Check valves block completely the passage in one direction. In the opposite direction the gas can flow through without throttling.

Short description

Nominal width	R1	T1	R2	T2	L	SW1	SW2	Order designation	Weight
NW 15	G 3/4	14	G 3/4	14	90	36	36	RV 15	0,47 kg
NW 20	G 1	18	G 1	18	106	41	41	RV 20	0,69 kg
NW 25	G 1	22	G 1	22	116	50	50	RV 25	
NW 32	G 1 1/2	26	G 1 1/2	26	139	60	60	RV 32	
NW 40	G 1 3/4	32	G 1 3/4	32	145	75	75	RV 40	

Technical data

medium	halon, CO ₂
operating pressure	≤ 120 bar
test pressure	180 bar
temperature scope	-20 °C to +60 °C
materials	brass, niro, Perbunan, plastic
nominal passage	